



## **Unlocking Multi-Material Additive Manufacturing**

How Selective Powder Deposition technology is the key to multi-material additive manufacturing.

# Unlocking Multi-Material Additive Manufacturing





# SPD technology for additive manufacturing

### Schaeffler Aerosint introduced

Aerosint was founded in 2016 with the goal to make powder based Additive Manufacturing multi-material. To accomplish that, it quickly became obvious that the powder spreading method needed to be completely redesigned.

The major breakthrough from Aerosint is the invention of a technology called "Selective Powder Deposition (SPD)". This patented technology selectively deposits two (or more) powders to form a single layer containing several materials. SPD is the key to unlock multi-material AM.

Aerosint is since 2023 part of Schaeffler Special Manufacturing and operates out of Belgium with customers worldwide.







## SPD Technology Explained

The SPD technology is an alternative to single material roller or blade recoaters traditionally used in powder bed processes.

This technology selectively deposits multiple powders to form a single layer containing at least two materials. The rotating powder patterning drums (1 per material) 'print' 300 µm powder pixels to form an homogeneous multi-material powder layer.

The technology applies to multiple additive manufacturing techniques like Laser Powder Bed Fusion (L-PBF), Binder Jetting or Die filling & Sintering.

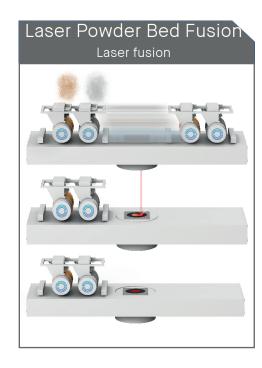

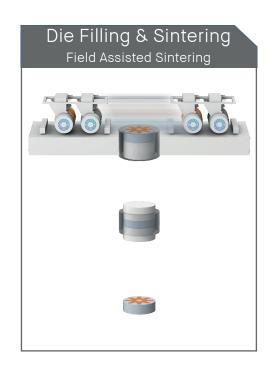



## 3 Material Recoater



Deposition width       115 mm         Min. layer thickness at the deposition       80 μm (in process layer height control)         Min. layer thickness when using the leveler       50 μm         Recoating speed       Up to 50 mm/s         Lateral powder pixel resolution       300 μm         Integrated powder containers       400 mL per drum         Hoppers size       Optional recoater hoppers available for continuous printing         Max operating temperature       80 °C         Control software and interface       Aerosint control software         Recoater size       480 x 361 x 182 mm	Simultaneous material deposition	3	
Min. layer thickness when using the leveler 50 µm  Recoating speed Up to 50 mm/s  Lateral powder pixel resolution 300 µm  Integrated powder containers 400 mL per drum  Hoppers size Optional recoater hoppers available for continuous printing  Max operating temperature 80 °C  Control software and interface Aerosint control software	Deposition width	115 mm	
Recoating speed  Up to 50 mm/s  Lateral powder pixel resolution  300 µm  Integrated powder containers  400 mL per drum  Optional recoater hoppers available for continuous printing  Max operating temperature  80 °C  Control software and interface  Aerosint control software	Min. layer thickness at the deposition	80 µm (in process layer height control)	
Lateral powder pixel resolution 300 µm  Integrated powder containers 400 mL per drum  Hoppers size Optional recoater hoppers available for continuous printing  Max operating temperature 80 °C  Control software and interface Aerosint control software	Min. layer thickness when using the leveler	50 μm	
Integrated powder containers  400 mL per drum  Optional recoater hoppers available for continuous printing  Max operating temperature  80 °C  Control software and interface  Aerosint control software	Recoating speed	Up to 50 mm/s	
Hoppers size  Optional recoater hoppers available for continuous printing  Max operating temperature  80 °C  Control software and interface  Aerosint control software	Lateral powder pixel resolution	300 μm	
Max operating temperature  Control software and interface  Control software and interface  Control software	Integrated powder containers	400 mL per drum	
Control software and interface Aerosint control software	Hoppers size	·	
	Max operating temperature	80 °C	
Recoater size 480 x 361 x 182 mm	Control software and interface	Aerosint control software	
	Recoater size	480 x 361 x 182 mm	
Recoater weight 28 kg (without powder)	Recoater weight	28 kg (without powder)	

#### **Key Benefits**

- Fast and precise powder depositionUp to 3 materials simultaneously
- Compatible with standard LPBF powders
- Patended



## Heat Sink Fraunhofer



«The multi-material heat sink consists of a high-strength and corrosion-resistant 316L steel casing that provides structural shielding for the coral-like heat dissipating core made from CuCrZr alloy.

The multi-material heat sink is proven to have a significantly lower temperature after heating.»

# Unlocking Multi-Material Additive Manufacturing

Use Cases

## Multi-material applications



#### **Thermal Conductivity / Insulation**

Conformal cooling channels (moulds, rocket nozzles, injection nozzles, brake calipers...), heat exchangers /sinks /pipes



#### **Electrical Conductivity / Insulation**

Battery connectors, satellite power transfer, thermo-electric modules, shielding, embedded sensors



#### **Wear Resistance**

Plain bearings, low friction profiles



#### **Magnetic Performances**

Motors, actuators, wave propagation optimization, antennas



#### **Aesthetics**


Luxury applications (watches, fashion accessories), sport accessories



#### **Abrasion / Corrosion Resistance**

Drillbit inserts, cutting tools, chemical reactors, conformal cooling



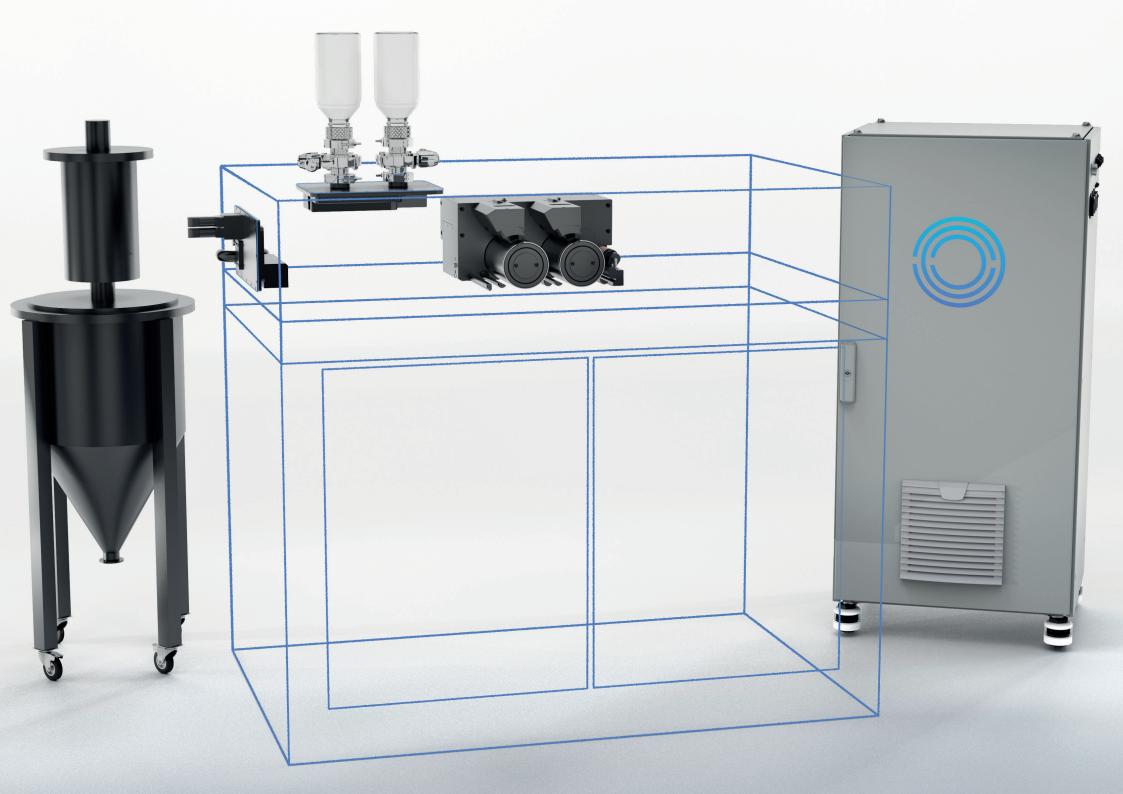

## L-PBF SYSTEMS

## AconityMIDI+ integration

# World's firts commercial multi-material L-PBF printer

The SPD recoater is an option on the AconityMIDI+ printer. This printer equipped with Aerosint's recoater is the first commercial multi-metal L-PBF printer available worldwide.

Our 3-materials recoater is compatible with the AconityMIDI+ printer.

The recoater is a removable module in the printer.

#### **Key Benefits**

- Multi-material L-PBF printing enabled
- External powder hoppers for large size printing
- Up to 3 materials simultaneously
- Compatible with standard LPBF powders
- Removable module for easy shift to single material



Print technology L-PBF	Materials	up to 3
<b>Chamber</b> 1300x530x200mm	Lasers	up to 4



## SINTERING SYSTEM

## Automatic die filling machine

### For multi-material sintering research

This Aerosint die filling platform is a standalone setup allowing to stack up to 3 powders precisely in a mold with the SPD technology.

This bulk powder can then be sintered using Field Assisted Sintering Technology. This binder-free technique enables the combination of multiple materials into a multimaterial blank ready for final machining.

This equipment can be used with metal powders, ceramic powders and combinations



#### **Key Benefits**


- Fast and precise powder deposition
- Up to 3 materials simultaneously
- Compatible with standard LPBF powders
- Patended

Technology
Die pressing/Sintering
Matarial trus

**Material type**Ceramics and metals

Materials up to 3

Size  $\leq 100 \text{ mm } \emptyset \text{ dies}$ 

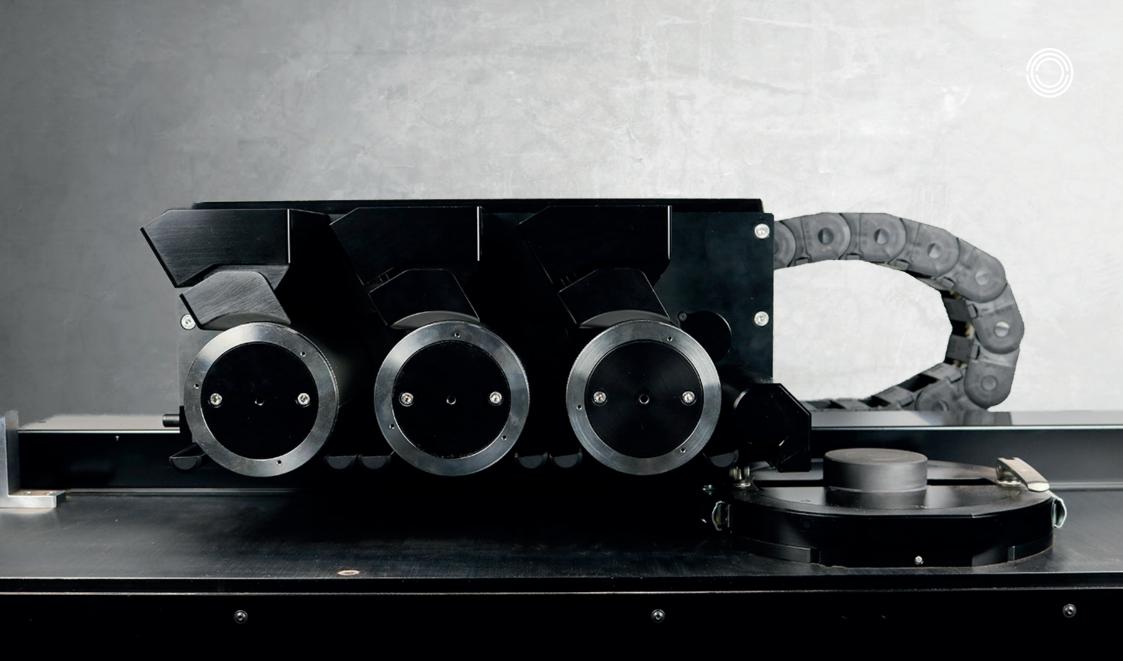

For graphite and steel dies offering a wide range of consolidation options, including sintering via Hot-Pressing or Field Assisted Sintering (FAST/SPS).

Available materials

## Printing services

## Metals

### Never ending R&D process

Aerosint supports companies in their journey towards multi-material additive manufacturing by making our equipment and engineering know-how available to their organization.

Technical questions, material compatibility, Interface aspects, mechanical properties of resulting parts, etc.

Fully independently or together with other research partners we can cover the whole spectrum of a complete application development project.

This includes a printing service for our customers.





Others feasible:

Variations of stainless steel alloys +
other copper alloys or same family pair materials

Multi-Ceramics is being developed

R&D



#### **Schaeffler Aerosint**

Aerosint was founded in 2016 with the goal to make powder based Additive Manufacturing multi-material. To accomplish that, it quickly became obvious that the powder spreading method needed to be completely redesigned.

The major breakthrough from Aerosint is the invention of a technology called

"Selective Powder Deposition (SPD)". This patented technology selectively deposits two (or more) powders to form a single layer containing several materials. SPD is the key to unlock multi-material AM.

Aerosint is since 2023 part of Schaeffler Special Machinery and operates out of Belgium with customers worldwide.

Aerosint.com

31 Rue D'Abhooz | 4040 Herstal BELGIUM +32 (0)4 422 167 30